


Close-coupled Chemical Pumps sealless, with magnetic drive

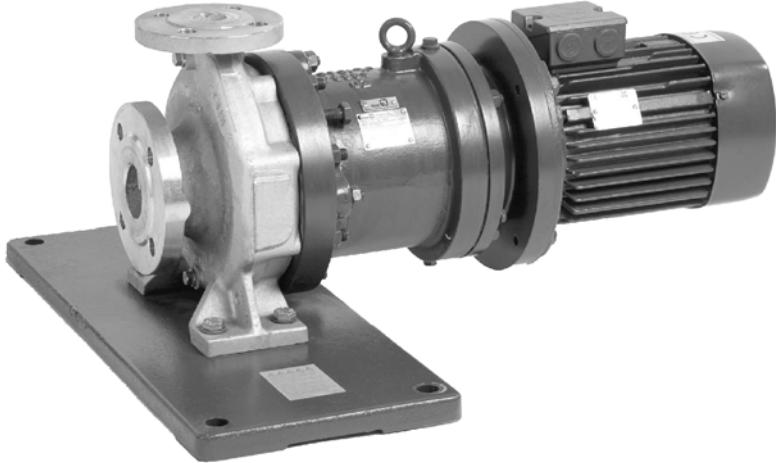

Automation products available:

- PumpExpert
- Hyamaster
- hyatronic

Fields of Application

For handling aggressive, toxic, explosive, valuable, inflammable, malodorous or hazardous liquids in the chemical, petrochemical and general industries.


Any CPK pump with shaft seal can be converted easily, taking into account the motor height. The casing and the impeller of the original pump can be used again!

Design

Volute casing pump in close-coupled design, fitted with a radial impeller, single-entry, single-stage, sealless, with magnetic drive. Hydraulic end and casing dimensions are identical with standardized chemical pump CPK to EN 22 858 / ISO 2858 / ISO 5199.

Installation: horizontal and vertical.

Designation

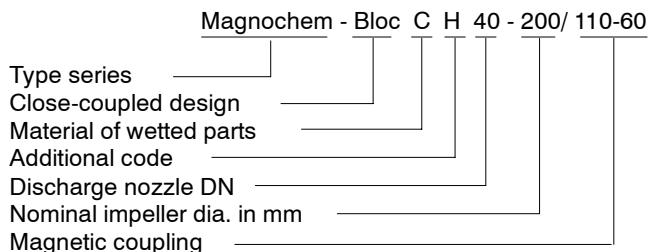

Additional codes:
H = Heatable design

Operating Data


Capacities	Q	up to 240 m ³ /h (67 l/s)
Heads	H	up to 153 m
DN discharge nozzle	DN	from 25 to 125
Motor rating	P	from 1.1 to 22 kW

Certification


Certified quality management ISO 9001.

Selection Charts

$n = 1450/1750 \text{ 1/min}$

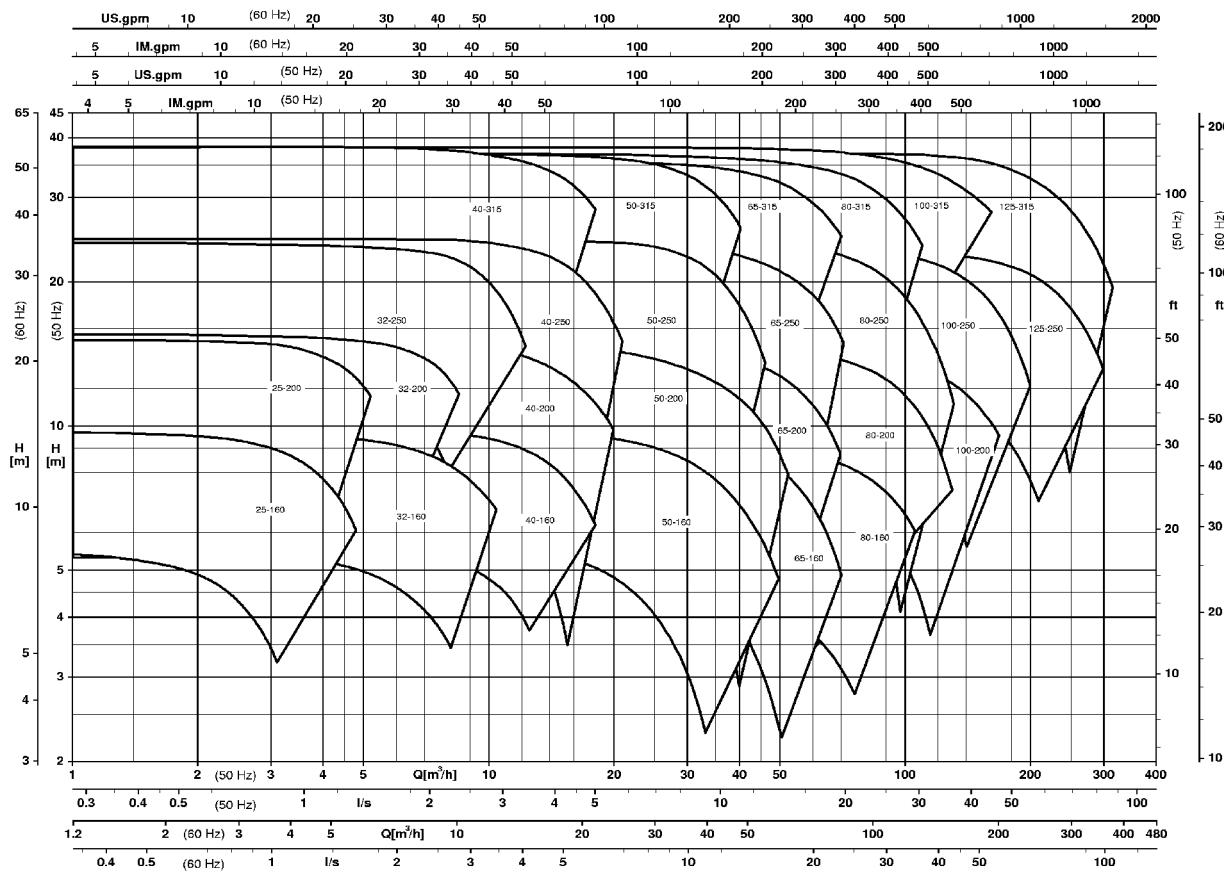

$n = 2900/3500 \text{ 1/min}$

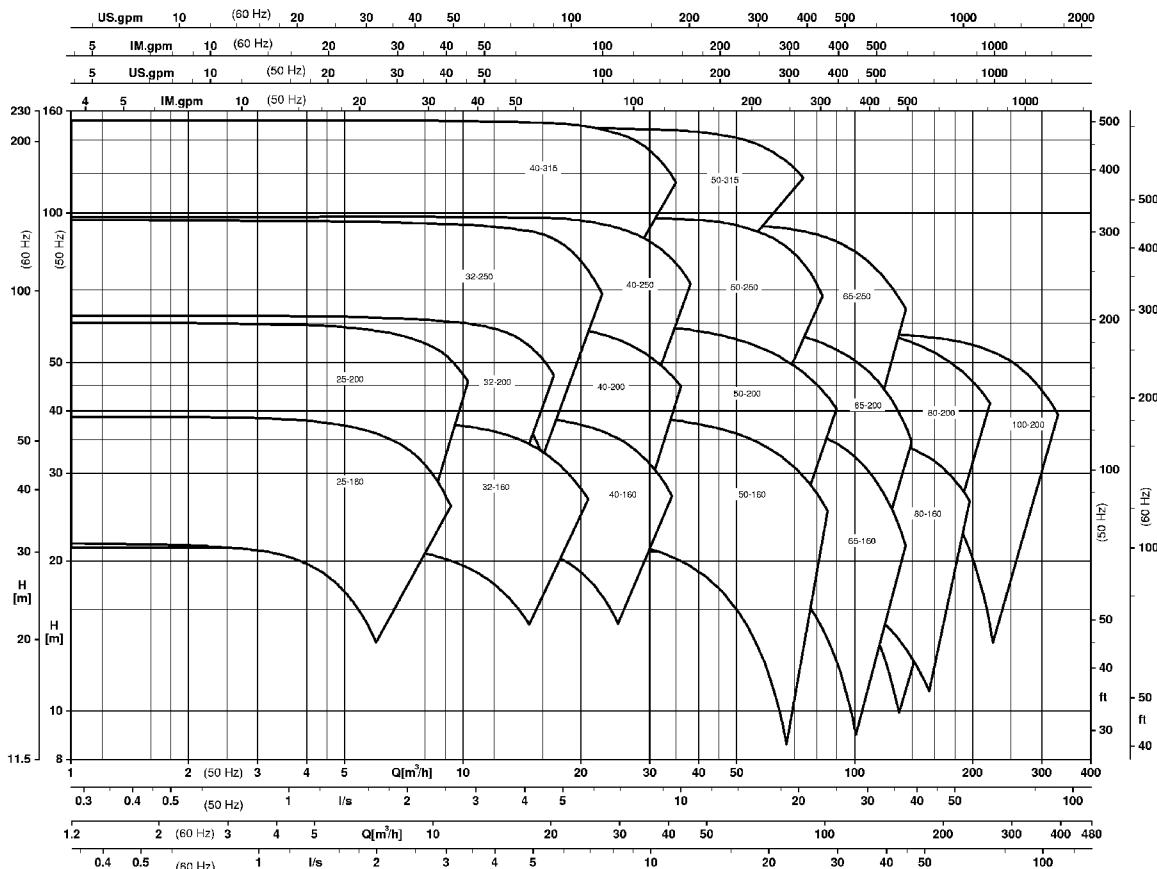

Material Variants

Part No.	Description	S2/S4	E	E4	C1/C1V ⁴⁾	C3.1/C3.2
102	Volute casing	JS1025 ⁶⁾	GP240GH+N	1.7706	1.4408	Noridur 1.4593
161	Casing cover	P250GH ³⁾	P250GH ³⁾	P250GH ³⁾	1.4571/1.4408	1.4462
183	Support foot	S235JRG2	S235JRG2	S235JRG2	S235JRG2	S235JRG2
210.03	Shaft (Plain bearings)	1.4462	1.4462	1.4462	1.4462	1.4462
230	Impeller	JL1040 1) ⁷⁾	JL1040 1) ⁷⁾	JL1040 1) ⁷⁾	1.4408	Noridur 1.4593
310	Plain bearing with spring	Sicadur ^{® 9)} 1.4571	Sicadur ^{® 9)} 1.4571	Sicadur ^{® 9)} 1.4571	Sicadur ^{® 9)} 1.4571	Sicadur ^{® 9)} 1.4462
344	Bearing bracket lantern	JL1040 2) ⁷⁾	JL1040 2) ⁷⁾	JL1040 2) ⁷⁾	JL1040 2) ⁷⁾	JL1040 2) ⁷⁾
817	Flange/containment shroud/containment shroud bottom	1.4571 ⁸⁾ / 2.4610/ 1.4462	1.4571 ⁸⁾ / 2.4610/ 1.4462	1.4571 ⁸⁾ / 2.4610/ 1.4462	1.4571/ 2.4610/ 1.4462	1.4462/ 2.4610/ 1.4462
818.01	Inner rotor	1.4571/1.4539	1.4571/1.4539	1.4571/1.4539	1.4571/1.4539	1.4462/1.4539
818.02	Outer rotor	St	St	St	St	St
920.95	Impeller nut	A4	A4	A4	A4	1.4462

1) impeller tip speed $u > 48 \text{ m/s}$ and/or $t < -30^\circ\text{C}$: 1.4408; bearing bracket P 04/05: always JS1025 impellers

2) steel version available

3) $t < -10^\circ\text{C}$: 1.4571/1.4408

4) C1V = 1.4408 as per VDMA 24 276

5) Sicodur Supra coating (diamond coating of the SSiC) optional

6) to EN 1563 = GJS-400-18-LT


7) to EN 1561 = GJL-250

8) magnetic coupling 165: 1.4462


9) Sicadur[®] = SiC⁵⁾/1.4462

Pressure and Temperature Limits

Material variant S2

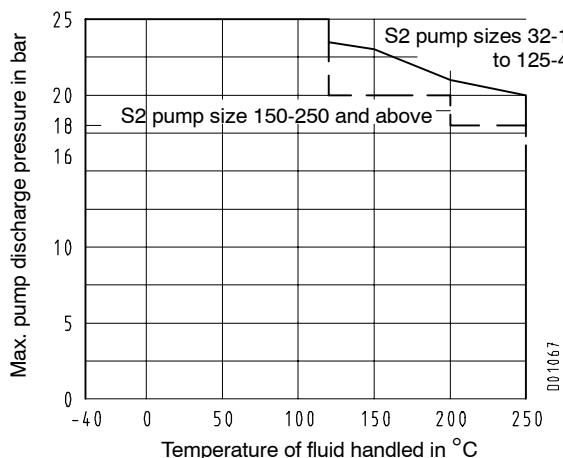

Material variants C1, C1V, C3.1/C3.2 and E

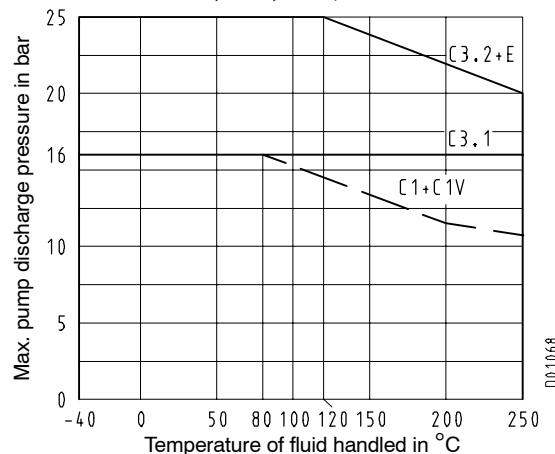

		Material variant: S4 Pump casing in JS1025 $\sigma_{0.2}$ values to EN 1563					Material variant: E4 Pump casing in 1.7706 $\sigma_{0.2}$ values to EN 10213-2				
Bearing bracket	Size	P_{max} at 50 °C	P_{max} at 120 °C	P_{max} at 150 °C	P_{max} at 200 °C	P_{max} at 250 °C	P_{max} at 20 °C	P_{max} at 150 °C	P_{max} at 200 °C	P_{max} at 250 °C	
P02	32-160	-	-	-	-	-	40.0	40.0	40.0	40.0	
	32-200	-	-	-	-	-	40.0	38.5	37.4	36.5	
	40-160	40.0	40.0	40.0	36.6	34.9	40.0	40.0	40.0	40.0	
	40-200	40.0	39.1	38.5	37.2	35.4	40.0	38.5	37.4	36.5	
	50-160	40.0	40.0	40.0	38.6	36.8	40.0	40.0	40.0	40.0	
	50-200	40.0	39.1	38.5	37.2	35.4	40.0	38.5	37.4	36.5	
P03	32-250	-	-	-	-	-	40.0	40.0	40.0	40.0	
	40-250	40.0	40.0	40.0	37.6	35.8	40.0	40.0	40.0	40.0	
	40-315	-	-	-	-	-	40.0	40.0	40.0	40.0	
	50-250	40.0	40.0	40.0	36.8	35.0	40.0	40.0	40.0	40.0	
	50-315	-	-	-	-	-	40.0	40.0	40.0	40.0	
	65-160	40.0	40.0	40.0	36.5	34.8	40.0	40.0	40.0	40.0	
	65-200	38.2	36.0	35.5	34.5	33.5	39.0	35.4	34.4	33.6	
	65-250	40.0	40.0	40.0	36.7	34.9	40.0	40.0	40.0	40.0	
	80-160	40.0	40.0	40.0	37.0	35.2	40.0	40.0	40.0	40.0	
	80-200	38.2	36.0	35.5	34.5	33.5	40.0	40.0	40.0	40.0	
P04	80-250	40.0	40.0	40.0	37.3	35.5	40.0	40.0	40.0	40.0	
	100-200	38.2	36.0	35.5	34.5	33.5	39.0	35.4	34.4	33.6	
	65-315	-	-	-	-	-	40.0	40.0	40.0	40.0	
	80-315	-	-	-	-	-	40.0	40.0	40.0	40.0	
	100-250	40.0	40.0	40.0	37.7	35.9	40.0	40.0	40.0	40.0	
	100-315	-	-	-	-	-	40.0	40.0	40.0	40.0	
P04	125-250	40.0	40.0	40.0	37.5	35.7	40.0	40.0	40.0	40.0	
	125-315	-	-	-	-	-	40.0	40.0	40.0	40.0	

Casing bolts: spot-faced
admissible pressures in bar at °C

Calculation of casing to TFFSC without TRD
Limit conditioned by type series 40 bar p/p' = 1.5

Magnochem-Bloc at a Glance

Hydraulics:
From the CPK pump series, well-proven more than 200,000 times


Casing cover:
available in variants for heating, external liquid feed and direct temperature measuring.

Cooling/lubrication:
forced circulation; minor temperature rise at the containment shroud, no NPSH deterioration.

Backup ring and assembling aid:
Protects the containment shroud from damage

Temperature monitoring at the containment shroud with PT 100 (option)

Casing:
heatable version available

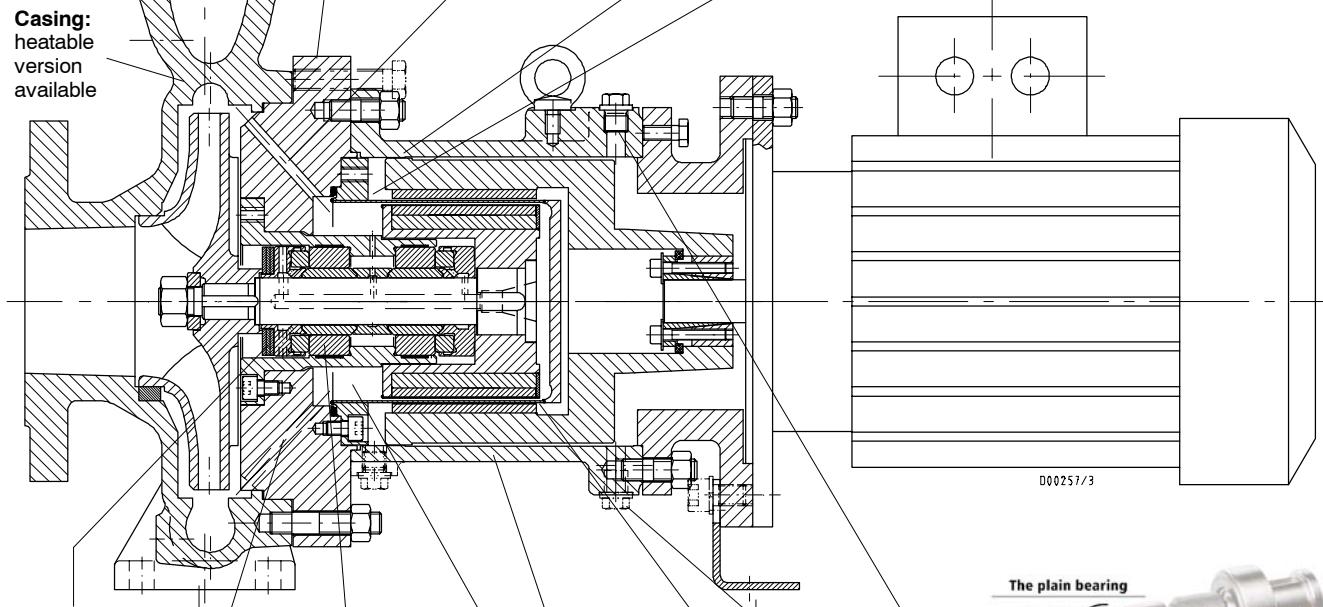

Bearings secured
for large temperature range, insensitive to temperature changes

Drain:
Product drains off automatically at the lowest point of the containment shroud

Bearing assembly (rotor)
Sturdy plain bearings made of silicon carbide, product lubricated, for maximum service life.

Diamond-coated bearings
Sicodur Supra are optional

Heating:
Available for rotor space and/or lantern (option)

Containment shroud:
Containment shroud up to PN 25 in Hastelloy, for optimum corrosion resistance at minimal eddy current losses

Leakage monitoring:
Facilities provided at the highest (vapour) and at the lowest (condensate) point (optional)

Safety:
Pump with magnetic coupling, absolutely leakage-free, with containment shroud made of Hastelloy C4. Only 2 static seals. Temperature and leakage monitoring possible.

Handling:
Easy to assemble.
When the drive unit is removed, the can remains bolted to the casing, thus sealing off the medium (pump need not be drained).

Economic viability:
Any existing CPK pump within the Magnochem selection range can be converted without any problems (Please refer to Magnochem-Bloc selection chart)



Specifications

	Units	25-160	25-200	32-160	32-200	40-160	40-200	50-160	50-200	32-250	40-250	40-315	50-250	50-315	65-160	65-200	65-250	80-160	80-200	80-250	100-200	65-315	80-315	100-250	100-315	125-250	125-315	
Bearing bracket		P 02										P 03										P 04						
General	corrosion allowance	mm	3										3										3					
	impeller outlet width	mm	6	6	7	7	9	7	15	12	6	7	8	10	8	20	16	13	27	22	17	29	10	14	23	19.5	32	26
	impeller inlet Ø	mm	45	45	52	52	65	65	82	82	52	65	65	84	84	89	96	96	100	114	114	122	96	129	129	135	154	154
	max. impeller Ø	mm	see individual curve																									
	min. impeller Ø	mm	see individual curve																									
Pressure	max. operating pressure limit	bar	see diagram																									
Temp.	min./max. temp. of medium handled	°C	1.5 x permissible pump discharge pressure																									
			-40/250																									

Magnetic Coupling / Pump Size Combinations

Bearing bracket	Impeller Ø	Size of magnetic coupling	
		110-...	165-...
P 02	-160	X	
	-200	X	
P 03	-160	X	X
	-200	X	X
	-250	X	X
	-315	X	X
P 04	-250	X	X
	-315	X	X

110 - 80
Length of magnet (mm)
Containment shroud Ø (mm)

A computerized selection programme is used for dimensioning the magnetic coupling and determining the correct combination between magnetic coupling and pump size.

Motor/Pump Size Combinations (IEC standardized motors, type of construction B5)

Pump size	Motor power in kW											
	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11.0	15.0	18.5	22.0	
25-160	X	X	X	X	X	X	X	-	-	-	-	
25-200	X	X	X	X	X	X	X	X	X	X	-	
32-160	X	X	X	X	X	X	X	-	-	-	-	
32-200	X	X	X	X	X	X	X	X	X	X	-	
32-250	X	X	X	X	X	X	X	X	X	X	X	
40-160	X	X	X	X	X	X	X	-	-	-	-	
40-200	X	X	X	X	X	X	X	X	X	X	-	
40-250	X	X	X	X	X	X	X	X	X	X	X	
40-315	X	X	X	X	X	X	X	X	X	X	X	
50-160	X	X	X	X	X	X	X	X	X	X	X	
50-200	X	X	X	X	X	X	X	X	X	X	X	
50-250	X	X	X	X	X	X	X	X	X	X	X	
50-315	X	X	X	X	X	X	X	X	X	-	-	
65-160	X	X	X	X	X	X	X	X	X	X	X	
65-200	X	X	X	X	X	X	X	X	X	X	X	
65-250	X	X	X	X	X	X	X	X	X	X	X	
65-315	-	-	X	X	X	X	X	X	X	X	X	
80-160	X	X	X	X	X	X	X	X	X	X	X	
80-200	X	X	X	X	X	X	X	X	X	X	X	
80-250	-	-	X	X	X	X	X	X	X	X	X	
80-315	-	-	-	-	X	X	X	X	X	X	X	
100-200	-	-	X	X	X	X	X	X	X	X	X	
100-250	-	-	-	-	X	X	X	X	X	X	X	
100-315	-	-	-	-	X	X	X	X	X	X	X	
125-250	-	-	-	-	-	X	X	X	X	X	X	
125-315	-	-	-	-	-	X	X	X	X	X	X	

Pump Sizes

Discharge nozzle DN	160	200	250	315	Bearing bracket
					P 02
25	x	x			P 03
32	x	x	x		
40	x	x	x	x	
50	x	x	x	x	P 04
65	x	x	x	x	
80	x	x ¹⁾	x ¹⁾	x ¹⁾	
100		x ¹⁾	x ¹⁾	x ¹⁾	
125			x	x	

□ Casing with double volute

1) double volute; casing not available in material C1.

Balancing

On Magnochem pumps, axial forces are reduced by back vanes or by a discharge-side sealing gap with balancing holes, depending on the pump size.

The load acting on the thrust bearings is markedly reduced, which considerably increases operating reliability.

Documentation

Printed documentation adapted to CE requirements

- general assembly drawing with list of components
- general arrangement drawing / dimensions table
- operating instructions



Forces and Moments

Magnochem pumps are designed for handling forces and moments in accordance with ISO 5199.

Heating

(optional: rotor space and/or lantern)

Rotor space

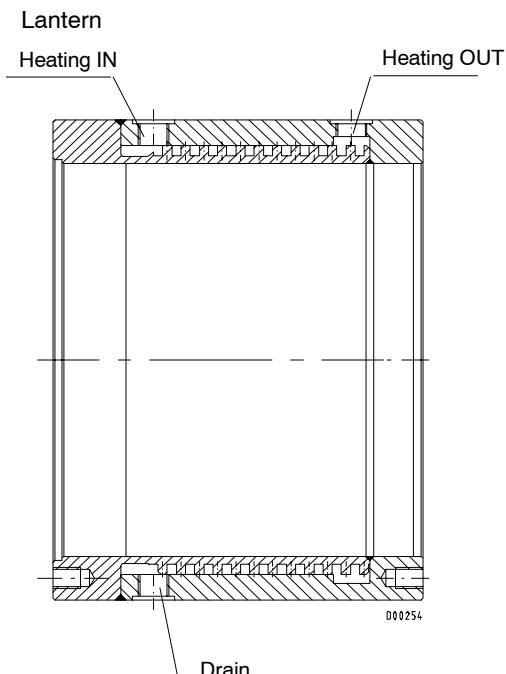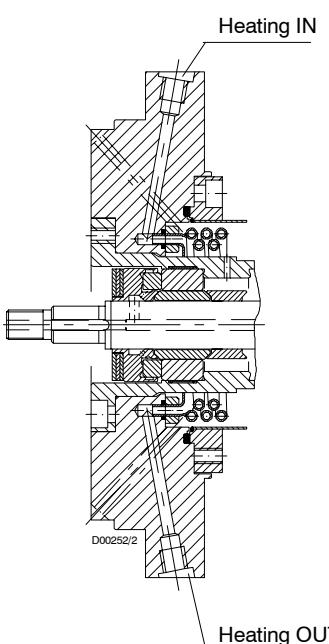

Heated lantern
 t_{max} 120 °C
 p_{max} 10 bar

Heating of Rotor Space

heating coil welded in			
hot water/saturated steam		heat transfer oil	
t_{max}	p_{max}	t_{max}	p_{max}
250 °C	20 bar	250 °C	6 bar

Dry-running Protection

If there is a risk of the pumps running dry, protection against dry-running must be provided for. This can be achieved by appropriate measures on site (pump power monitoring, flow meter, level meter, etc.), depending on the site conditions.

Accessories

- PT 100 (for monitoring the temperature at the containment shroud)
 - Pump power monitoring unit
- Other accessories on request.

Acceptance Tests / Guarantees

Materials tests

Test report 2.2 on request

Product tests

Inspection certificate 3.1 as per EN 10 204, on request, for: pressure test of complete pump

Hydraulic tests

The following acceptance tests may be performed and certified at an extra charge:

Performance test ISO 9906

NPSH test

Warranties are given within the scope of the valid delivery conditions.

Coating and Preservation

(acc. to works standard AN 1865)

Magnochem-Bloc S, -E	< 150 °C	N 1 1 1 W
	≥ 150 °C	N 7 7 7 W
Magnochem-Bloc C1/C3	< 150 °C	N 0 1 1 U
	≥ 150 °C	N 0 7 7 U

Treatment of unmachined parts

Coating - pressure-retaining parts

Coating - bearing bracket, lantern, baseplate

Coating - motor

Preservation

N = reaction primer, parts in contact with the fluid handled without finish coat.

0 = without top coat

1 = synthetic enamel RAL 5002, ultramarine blue

7 = heat resistant paint RAL 9007 gray aluminum

U = untreated

W = rinsed with water repellent agent; blank parts liable to rust with protective coating


First Spare Parts Stock Recommended for Two Years' Operation after Commissioning

Part No.	Description	sets	No. of pumps (incl. standby pumps)						
			2	3	4	5	6+7	8+9	10 and more
	Set of gaskets comprising: U-ring/Joint ring 411.08 Joint ring 411.01/.03/.10		2	2	3	3	3	4	50 %

List of Selected Spare Parts Recommended for Operation to DIN 24296

Part No.	Description		No. of pumps (incl. standby pumps)						
			2	3	4	5	6+7	8+9	10 and more
210.03	Shaft (inner rotor)	pcs.	1	1	1	2	2	2	20 %
230	Impeller	pcs.	1	1	1	2	2	2	20 %
314.01	Thrust bearing	pcs.	1	1	2	2	3	4	50 %
314.02	Thrust bearing	pcs.	1	1	2	2	3	4	50 %
391.01	Bearing ring carrier	pcs.	1	1	2	2	3	4	50 %
411.08	U-ring/Joint ring	pcs.	2	2	3	3	3	4	50 %
411.01	Joint ring	pcs.	4	6	8	8	9	12	150 %
411.03	Joint ring	pcs.	4	6	8	8	9	12	150 %
411.10	Joint ring	pcs.	4	6	8	8	9	12	150 %
502.01	Casing wear ring (only for S variant)	pcs.	2	2	2	3	3	4	50 %
529.21/22	Bearing sleeve	pcs.	1	1	2	2	3	4	50 %
509.21	Intermediate ring	pcs.	1	1	2	2	3	4	50 %
82-15	Containment shroud	pcs.	1	1	2	2	2	3	25 %
950.23	Cup spring	pcs.	1	1	2	2	3	4	50 %

Dimensions of Non-heatable Pump

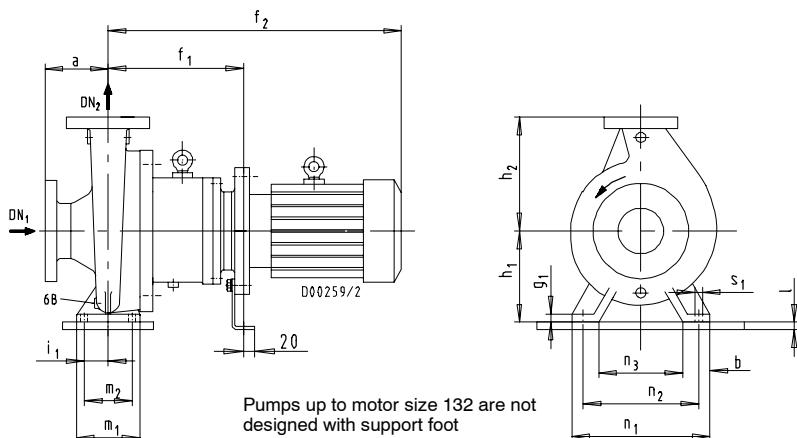

Flanges

Magnochem-Bloc	Design	DN ₁	DN ₂
-C1	EN 1092-1, PN 16		
-S	EN 1092-2, PN 25		
-E	EN 1092-1, PN 25		
-C3.1	EN 1092-1, PN 16		
-C3.2	EN 1092-1, PN 25		

Pump Dimensions

Pump size	Pump dimensions													for motors										Weight 3) kg			
	DN ₁	DN ₂	a	b	g ₁	h ₁	h ₂	i ₁	m ₁	m ₂	n ₁	n ₂	n ₃	s ₁	f ₁	f ₁	f ₂	90S	90L	100L	112M	132S	132M	160M	160L	180M	180L
25-160 1)	40	25	80	50	14	132	160	35	100	70	240	190	140	14	304	-	586	637	670	672	739	739	-	869	-	-	78
25-200 2)		80	50	14	160	180		35	100	70	240	190	140	14	304	338	586	637	670	672	739	739	-	869	-	-	87
32-160 1)	50	32	80	50	14	132	160	35	100	70	240	190	140	14	304	-	586	637	670	672	739	739	-	-	-	-	78
32-200 2)		80	50	14	160	180		35	100	70	240	190	140	14	304	338	586	637	670	672	739	739	869	869	-	-	88
32-250		100	65	16	180	225		47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	159
40-160 1)	65	40	80	50	14	132	160	35	100	70	240	190	140	14	304	-	586	637	670	672	739	739	-	-	-	-	80
40-200 2)		100	50	14	160	180		35	100	70	265	212	165	14	304	338	586	637	670	672	739	739	869	869	-	-	91
40-250		100	65	16	180	225		47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	165
40-315		125	65	18	200	250		47.5	125	95	345	280	215	14	389	423	671	722	755	757	824	824	954	954	1033	1033	191
50-160 2)	80	50	100	50	14	160	180	35	100	70	265	212	165	14	304	338	586	637	670	672	739	739	869	869	-	-	86
50-200 2)		100	50	14	160	200		35	100	70	265	212	165	14	304	338	586	637	670	672	739	739	869	869	948	948	102
50-250		125	65	16	180	225		47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	167
50-315		125	65	18	225	280		47.5	125	95	345	280	215	14	389	423	671	722	755	757	824	824	954	954	1033	1033	194
65-160 2)	100	65	100	65	15	160	200	47.5	125	95	280	212	150	14	389	423	671	722	755	757	824	824	954	954	1033	1033	144
65-200		100	65	16	180	225		47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	160
65-250		125	80	18	200	250		60	160	120	360	280	200	18	389	423	671	722	755	757	824	824	954	954	1033	1033	173
65-315		125	80	18	225	280		60	160	120	400	315	240	18	389	423	-	-	755	757	824	824	954	954	1033	1033	206
80-160	125	80	125	65	15	180	225	47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	153
80-200		125	65	16	180	250		47.5	125	95	345	280	215	14	389	423	671	722	755	757	824	824	954	954	1033	1033	177
80-250		125	80	18	225	280		60	160	120	400	315	240	18	389	423	-	-	755	757	824	824	954	954	1033	1033	207
80-315		125	80	18	250	315		60	160	120	400	315	240	18	389	423	-	-	755	757	824	824	954	954	1033	1033	224
100-200	125	100	125	80	16	200	280	60	160	120	360	280	200	18	389	423	-	-	755	757	824	824	954	954	1033	1033	182
100-250		140	80	18	225	280		60	160	120	400	315	240	18	389	423	-	-	755	757	824	824	954	954	1033	1033	213
100-315		140	80	18	250	315		60	160	120	400	315	240	18	389	423	-	-	755	757	824	824	954	954	1033	1033	246
125-250	150	125	140	80	18	250	355	60	160	120	400	315	240	18	389	423	-	-	-	-	824	824	954	954	1033	1033	228
125-315		140	100	20	280	355	75	200	150	500	400	300	23	389	423	-	-	-	-	824	824	954	954	1033	1033	252	

1) Mounting plate required for motor size 132


2) Mounting plate required for motor size 160/180

3) Max. weight without motor (depending on magnetic drive)

4) Motor dimensions are for construction type B5, max. overall length (make Siemens)



Mounting Plate

(not generally included in KSB's scope of supply; see 1) and 2))

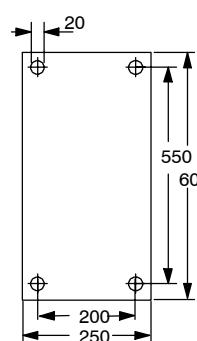

Height l: 25 mm
Weight: 24 kg

Dimensions of Heatable Pump

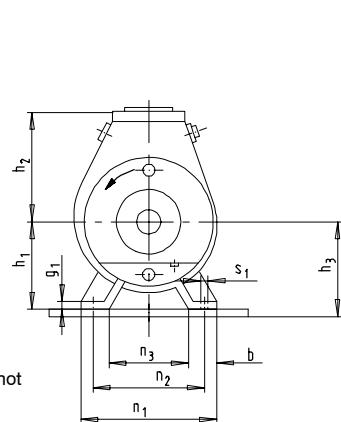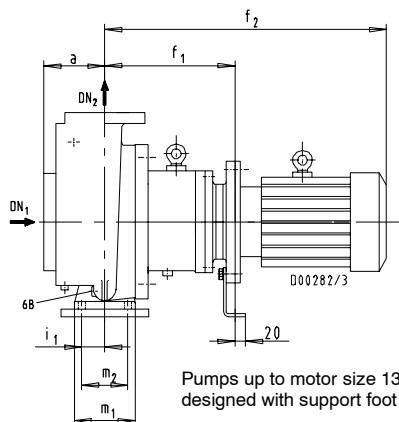

Flanges

Magnochem-Bloc	Design	DN ₁	DN ₂
-CH	EN 1092, PN 16		

Casing heatable

h_3 = Dimension between top edge of foundation and middle of suction nozzle, incl. any additional pump shims, etc.




Pump Dimensions

Pump size	Pump dimensions														for motors up to 132M	for motors above 160M	in mm								Weight ¹⁾			
	DN ₁	DN ₂	a	b	g ₁	h ₁	h ₂	h ₃	i ₁	m ₁	m ₂	n ₁	n ₂	n ₃	s ₁	f ₁	f ₁	90S	90L	100L	112M	132S	132M	160M	160L	180M	180L	
																												kg
25-160	40	25	80	50	14	132	160	160	35	100	70	240	190	140	14	304	-	586	637	670	672	739	739	-	-	-	-	83
32-160	50	32	80	50	14	132	160	160	35	100	70	240	190	140	14	304	-	586	637	670	672	739	739	-	-	-	-	81
32-200			80	50	14	160	180	180	35	100	70	240	190	140	14	304	338	586	637	670	672	739	739	869	869	-	-	91
32-250			100	65	16	180	225	180	47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	166
40-160	65	40	80	50	14	132	160	160	35	100	70	240	190	140	14	304	-	586	637	670	672	739	739	-	-	-	-	88
40-200			100	50	14	160	180	180	35	100	70	265	212	165	14	304	338	586	637	670	672	739	739	869	869	-	-	96
40-250			100	65	16	180	225	200	47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	172
40-315			125	65	18	200	250	225	47.5	125	95	345	280	215	14	389	423	671	722	755	757	824	824	954	954	1033	1033	210
50-160	80	50	100	50	14	160	180	180	35	100	70	265	212	165	14	304	338	586	637	670	672	739	739	869	869	-	-	94
50-200			100	50	14	160	200	180	35	100	70	265	212	165	14	304	338	586	637	670	672	739	739	869	869	948	948	201
50-250			125	65	16	180	225	200	47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	177
50-315			125	65	18	225	280	225	47.5	125	95	345	280	215	14	389	423	671	722	755	757	824	824	954	954	1033	1033	115
65-200	100	65	100	65	16	180	225	180	47.5	125	95	320	250	190	14	389	423	671	722	755	757	824	824	954	954	1033	1033	237
80-250	125	80	125	80	18	225	280	225	60	160	120	400	315	240	18	389	423	-	-	755	757	824	824	954	954	1033	1033	217
80-315			125	80	18	250	315	250	60	160	120	400	315	240	18	389	423	-	-	757	824	824	954	954	1033	1033	244	
100-250	125	100	140	80	18	225	280	250	60	160	120	400	315	240	18	389	423	-	-	757	824	824	954	954	1033	1033	281	
125-315	150	125	140	100	20	280	355	280	75	200	150	500	400	300	23	389	423	-	-	-	-	824	954	954	1033	1033	287	

1) Max. weight without motor (depending on magnetic drive)

2) Motor dimensions are for construction type B5, max. length (make Siemens)

Connections

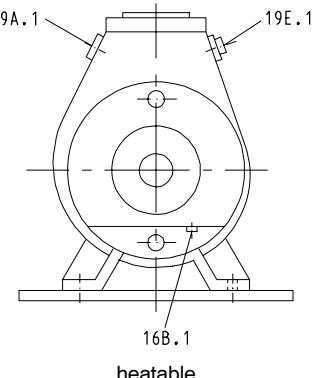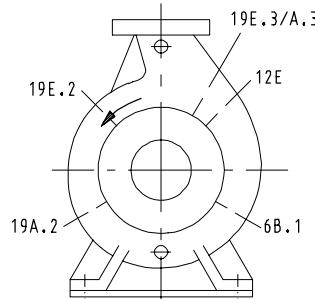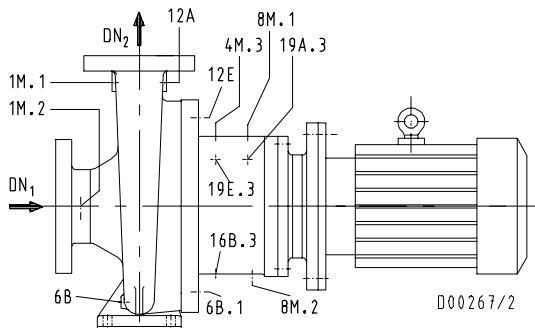


Connections

Connections	Size			Description	Connection by customer	KS B	Quantity required l/min	Pressure required bar	Max. pressure bar
	P02	P03	P04 G = ISO 228/1						
1 M.1 ¹⁾	G 1/4	G 1/4	G 1/2	Pressure gauge					
1 M.2 ¹⁾	G 1/4	G 1/4	G 1/2	Pressure gauge					
4 M.3	G 1/4			Temperature sensor, can					
6 B	G 1/4	G 3/8	G 1/2	Casing drain					
6 B.1	G 1/4			Shroud drain / Sealing liquid IN					
8 M.1	G 1/4			Leakage sensor (gas, vapour)					
8 M.2	G 1/4			Leakage sensor (liquid)					
12 E	G 1/4			Circulation liquid IN / Venting for external supply					
12 A	G 1/4			Circulation liquid OUT					
16 B.1	G 1/4			Condensate drain (heatable casing)					
16 B.3	G 1/4			Condensate drain (heatable lantern)					
19 E.1	G 3/8			Heating IN (casing)					
19 A.1	G 3/8			Heating OUT (casing)					
19 E.2	G 3/8			Heating IN (casing cover)					
19 A.2	G 3/8			Heating OUT (casing cover)					
19 E.3	G 3/8			Heating IN (lantern)					
19 A.3	G 3/8			Heating OUT (lantern)					

1) not applicable for heatable casing

General Drawing

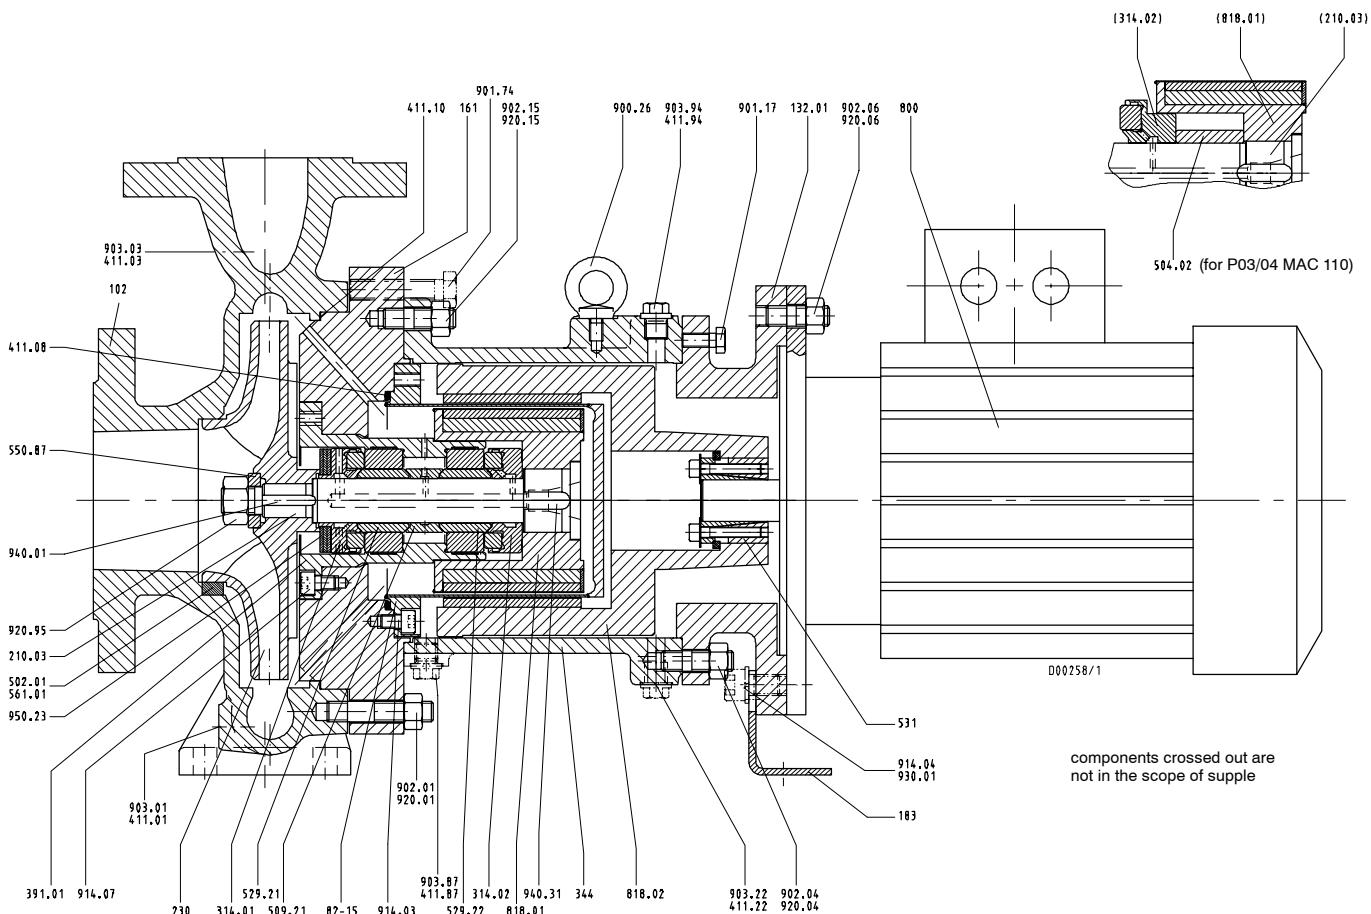

When ordering spare parts please always specify
the type series/pump size, works No. (stamped on the name plate and on the suction
nozzle flange), motor No. (serial No.), year of construction, quantity required, part No.,
part description, material, medium handled, sectional drawing No. and mode of dispatch.

Part No.	Description	Scope of Supply
102	Volute casing	with joint ring 411.01/03/10, casing wear ring 502.01 ¹⁾ , grooved pin 561.01 ¹⁾ , stud 902.01, screwed plug 903.01/03, hex. nut 920.01
132.01	Intermediate piece	with hex. head bolt 901.17, stud 902.06, hex. nut 920.06
161	Casing cover	with U-ring 411.08, joint ring 411.10, hex. head bolt 901.74, stud 902.15, hex. nut 920.15
183	Support foot	with socket head cap screw 914.04, lockwasher 930.01 (if any)
210.03	Shaft	with spacer ring 504.02, disc 550.87, hex. nut 920.95, key 940.01/31
230	Impeller	
310	Bearing assembly	consisting of axial plain bearing 314.01/02, bearing ring carrier 391.01, intermediate ring 509.21, bearing sleeve 529.21/22, socket head cap screw 914.07, cup spring 950.23
344	Bearing bracket lantern	with joint ring 411.22/87/94, eyebolt 900.26, stud 902.04, screwed plug 903.22/87/94, hex. nut 920.04
531	Locking element	complete
800	Motor	without key
82-15	Shroud	with socket head cap screw 914.03
818.01	Internal rotor	complete
818.02	External rotor	complete with hex. head bolt 901.58, lockwasher 930.58

1) only on Magnochem-Bloc S2

