

51 mm (2") Pump
Maximum Flow Rate:
685 lpm (181 gpm)

DIMENSIONAL DRAWING

PUMP DATA

Specifications:

Ship Weight.. 820 Threaded AL 47 kg (104 lb)
 820 Threaded SS 73 kg (161 lb)
 820 Threaded Iron 71 kg (156 lb)
 830 Flanged AL 54 kg (118 lb)
 830 Flanged SS 81 kg (178 lb)
 830 Flanged Iron 82 kg (181 lb)
Air Inlet 3/4"
Inlet.....51 mm (2")
Outlet.....51 mm (2")




PS820/PS830 METAL PUMP

PERFORMANCE

PS820/PS830 METAL FULL-STROKE PTFE-FITTED

Max. Flow Rate655 lpm (173 gpm)
 Max. Inlet Pressure8.6 bar (125 psig)
 Max. Solids Passage 6.4 mm (1/4")
 Max. Suction Lift6.1 m Dry (20.0') AL
 9.0 m Wet (29.5') AL
 6.4 m Dry (21.0') SS
 8.6 m Wet (28.4') SS
 6.6 m Dry (21.8') Iron
 9.0 m Wet (29.5') Iron

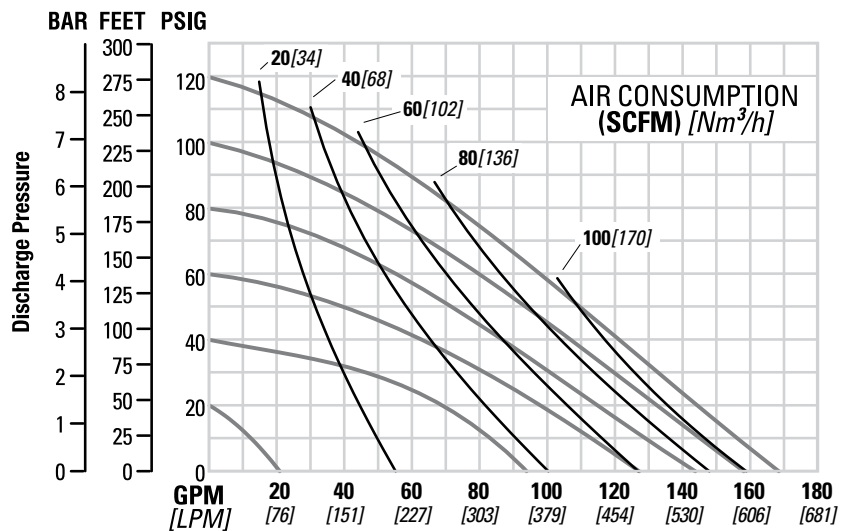

PS1520/PS1530 FIT METAL PUMP

76 mm (3") Pump
Maximum Flow Rate:
1026 lpm (271 gpm)

DIMENSIONAL DRAWING

PUMP DATA

Specifications:

Ship Weight.....

- 1520 Threaded AL 69 kg (152 lb)
- 1520 Threaded SS 126 kg (278 lb)
- 1520 Threaded Iron 114 kg (251 lb)
- 1530 Flanged AL 101 kg (223 lb)
- 1530 Flanged SS 137 kg (300 lb)
- 1530 Flanged Iron 124 kg (272 lb)

Air Inlet 3/4"

Flanged Inlet 76 mm (3")

Flanged Outlet..... 76 mm (3")

Threaded Inlet 3"

Threaded Outlet..... 3"

PS1520/PS1530 FIT METAL PUMP

PERFORMANCE
