

RPHd – Double-suction, Single-stage Heavy-duty BB2 Process Pump




Applications:

- Refineries
- Petrochemical and chemical industries
- Onshore and offshore processes

More information: www.ksb.com

RPHd – Double-suction, Single-stage Heavy-duty BB2 Process Pump to API 610 / ISO 13709

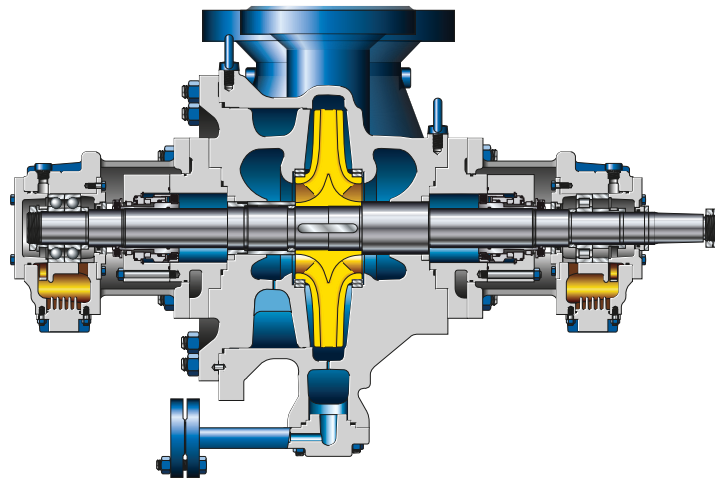

Robust design for longer service life

- Process pump in heavy-duty design to API 610
- Optimised pressure boundary and hydraulic system with reinforced optimised shaft

Wide range of variants for a broad application range and optimum adaptation to the system

- Numerous flange designs
- Large choice of materials
- Coolable/ heatable seal housing
- Various bearing lubrication variants

Long service life and high reliability of the bearings

- Heavy-duty paired 40° angular contact ball bearings
- Double volute and double-suction impeller
- Standard version with oil ring lubrication and labyrinth seals
- Version with hydrodynamic bearings for higher energy density

Lower operating costs and higher system availability

- Comprehensive hydraulic selection chart for optimum selection
- Better efficiencies and NPSH values than OH2 pumps
- No need for a separate cooling circuit; integrated cooling fins and optional fan impeller ensure optimum cooling of the bearing brackets.

Ease of service

- Easy to monitor and service due to top-top flange arrangement
- Suction-side casing cover simplifies rotor removal.
- Straightforward servicing due to mechanical seals to API 682 (cartridge design)
- Replaceable casing and impeller wear rings
- Modular design system reduces spare parts stock.

Materials

S5, S6, S8, C6, A8, D1, D2 and special materials

Technical data

	50 Hz	60 Hz
Max. flow rate	5100 m³/h / 22455 US gpm	6000 m³/h / 26417 US gpm
Max. head	550 m / 1804 ft	550 m / 1804 ft
Max. temperature	-80 °C to +450 °C / -112 °F to 842 °F	
Max. pressure	80 bar / 1160 psi	
Nominal diameter	100-400 mm / 4-16 in	

Other values on request



KSB SE & Co. KGaA
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com